


Generation 2 CDM-9 COB

Warm-Dimming

White LED Arrays



Features

- High flux densities exceeding 1350 lm from a 9 mm LES for directional lighting
- Superb efficacies up to 124 lm/W at 3000K, minimum 90 CRI
- 100 % factory tested at 85°C hot operating conditions
- Excellent beam uniformity with 10° narrow spot optics
- Halogen like and linear dimming profile options
- CCT tune range options from 1800K and 2000K to 2700K and 3000K
- 3 step binning for each CCT provides accurate color representation.
- Proprietary IC circuit provides smooth and flicker free dimming even at low level.
- Robust package design guarantees long lifetimes in demanding operating conditions.



Table of Contents

Ordering Information	2
Part Number Nomenclature	3
Binning Structure	4
Absolute Maximum Ratings	5
Characteristics	6
Angular Distribution and Typical Spectrum	9
Mechanical Dimensions	12
Shipping Tray Outline	13
Shipping Label	14
Revision History	15

Applications

- Spotlights/Track Lights
- Downlights
- Shop Lighting
- Hospitality Lighting
- Architectural and Specialty
- Residential Lighting
- Humancentric Lighting



Ordering Information

Ordering Part Numbers

The following table lists the products with typical flux and minimum flux measured at $T_j = 85^\circ\text{C}$ with 20 ms Pulse mode. The values at 25°C are calculated and shown for reference only.

CRI ¹	CCT	Output Flux (lm) ²			Drive Current (mA)	Ordering Part Number ³
		Typical (85°C)	Minimum (85°C)	Calculated Typical (25°C)		
>90	1800K	52	48	57	20	CDM-9-2718-90-36-DWZX-F3-3 CDM-9-3018-90-36-DWZX-F3-3 CDM-9-3020-90-36-DWZX-F3-3
	2000K	54	50	59	20	
	2700K	1312	1220	1443	350	
	3000K	1350	1256	1485	350	

Notes:

1. Luminus maintains a +/- 2 % tolerance on CRI measurements.
2. Luminus maintains a +/- 6 % tolerance on flux measurements.
3. DWZX=DWZ1 for Halogen dimming profile and DWZ2 for Linear Dimming Profile.



Part Number Nomenclature

All Luminus COB products are packaged and labeled with part numbers as outlined in the table on page 2. Luminus may include any smaller chromaticity bin that is contained in the larger bin as part of the ordered part. When shipped, each package will contain only a single flux and chromaticity bin. The part number designation is as follows:

CDM	9	MMNN	XX	VV	QQPP	FG	W
Product Family	LES ¹	CCT ²	Minimum CRI ^{3,4}	Typical Voltage	Package Configurator ⁵	Flux Bin	Chromaticity Bin
Chip on Board, Dimmable, Multi-die	9 mm LES diameter	See Note 2 below	90: CRI > 90	Volts (V)	DWZ1 DWZ2	See Page 2	See page 4 for bins


Notes:

1. Light Emitting Surface (LES) Diameter.
2. Correlated Color Temperatures (CCT). MM corresponds to the main CCT and NN refers to the dimmed CCT.
18 = 1800K
20 = 2000K
27 = 2700K
30 = 3000K
3. Minimum Color Rendering Index (CRI).
4. R9 value of 90 CRI products is >50 with a tolerance of +/- 5 %.
5. DWZ1/2 is the configurator referring to Gen 2 Dimmable COB, 1 indicates a halogen-like dimming curve, 2 refers to a linear dimming curve.



Binning Structure

Chromaticity Binning Diagram^{1,2}

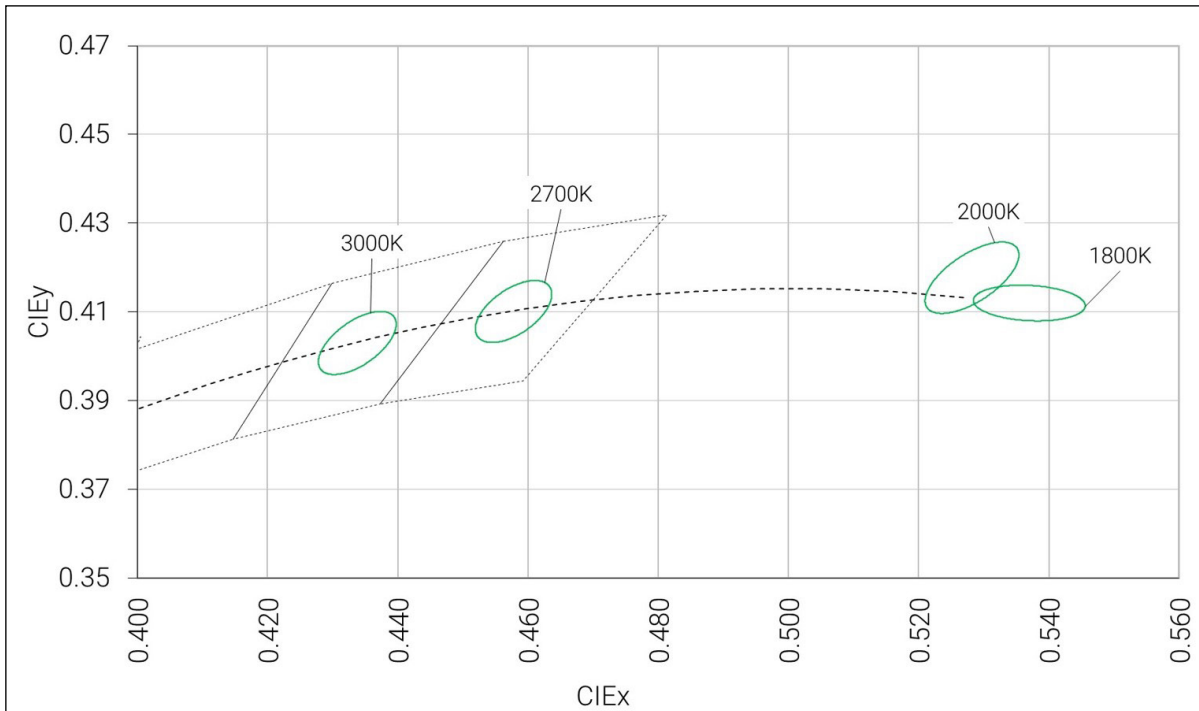

CCT	Center Point		Angle	3-step Bin	
	CIE _x	CIE _y	θ (°)	a	b
1800K	0.5370	0.4120	-5	0.0086	0.0040
2000K	0.5282	0.4177	49.9	0.0098	0.0045
2700K	0.4578	0.4101	53.7	0.0081	0.0042
3000K	0.4338	0.4030	53.2	0.0083	0.0041

Notes:

- LED chromaticity is measured and binned at 85°C junction temperature with the V_f and I_f condition of 36 V, 350 mA respectively.
- Luminus maintains a tolerance of ± 0.005 on Chromaticity (CIE_x, CIE_y) measurement.



Absolute Maximum Ratings¹

Parameter		Symbol	Value	Unit
Forward Current	Maximum	$I_{f\max}$	800	mA
Power Dissipation	Maximum	$P_{D\max}$	29.6	W
Operating Case Temperature	Maximum	T_C	105	°C
Junction Temperature	Maximum	T_j	140	°C

Note:

1. To prevent damage, do not exceed maximum operating conditions.



Characteristics^{1,2,3}

Parameter		Symbol	Value	Unit
Light Emitting Surface Diameter ⁴		LES	9.2	mm
Forward Voltage - Warm White Mode ($I_f=20$ mA)	Minimum	$V_{f\ min}$	25.0	V
	Typical	$V_{f\ typ}$	27.0	
	Maximum	$V_{f\ max}$	29.0	
Forward Voltage - Cool White Mode ($I_f=350$ mA) ⁵	Minimum	$V_{f\ min}$	31.0	V
	Typical	$V_{f\ typ}$	33.5	
	Maximum	$V_{f\ max}$	37.0	
Viewing Angle		$2\theta_{1/2}$	120	°


Notes:

1. All product operating specifications are subject to change without advance notice.
2. Device operation not recommended at drive currents less than 10% of 20 mA
3. Device measurements are taken with $T_j = 85^\circ\text{C}$ with 20 ms Pulse mode.
4. The LES diameter is defined consistent with industry practices and aligned to optical characteristics. Please use ray files for all optics designs.
5. Voltage is specified at typical forward current. For voltage at higher drive current, refer to performance graphs.




Relative Luminous Flux vs Forward Current

$T_j = 85^\circ\text{C}$

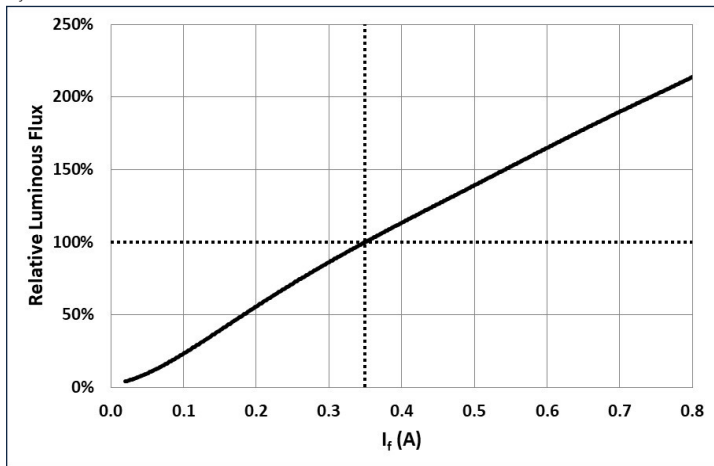


Relative Luminous Flux vs Temperature

$I_f = 350\text{ mA (Cool White)}, I_f = 20\text{ mA (Warm White)}$

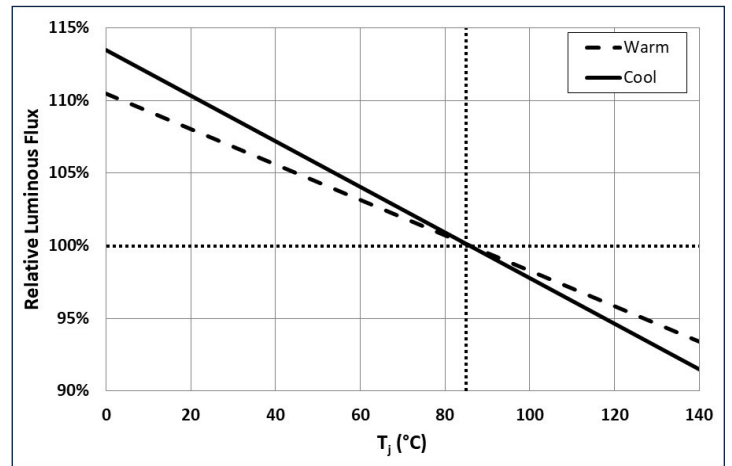


Forward Voltage vs Forward Current

$T_j = 85^\circ\text{C}$

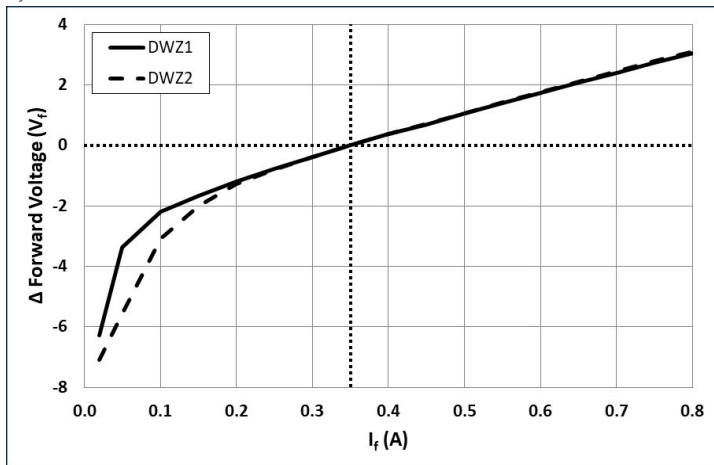


Forward Voltage vs Temperature

$I_f = 350\text{ mA (Cool White)}, I_f = 20\text{ mA (Warm White)}$

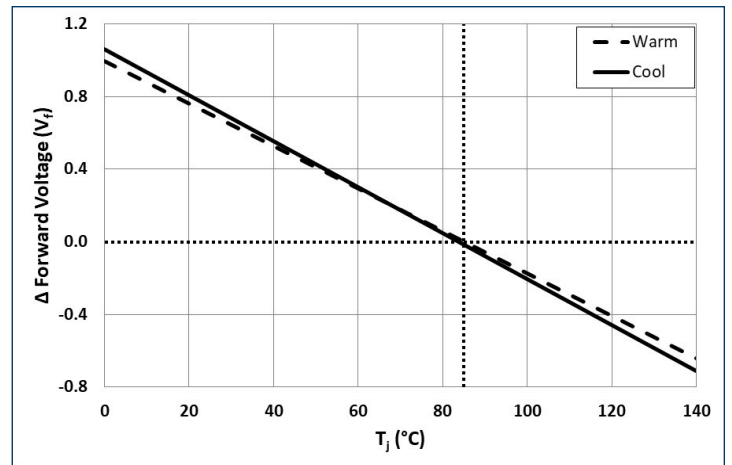


Relative Chromaticity vs Temperature

$I_f = 350\text{ mA (Cool White)}, I_f = 20\text{ mA (Warm White)}$

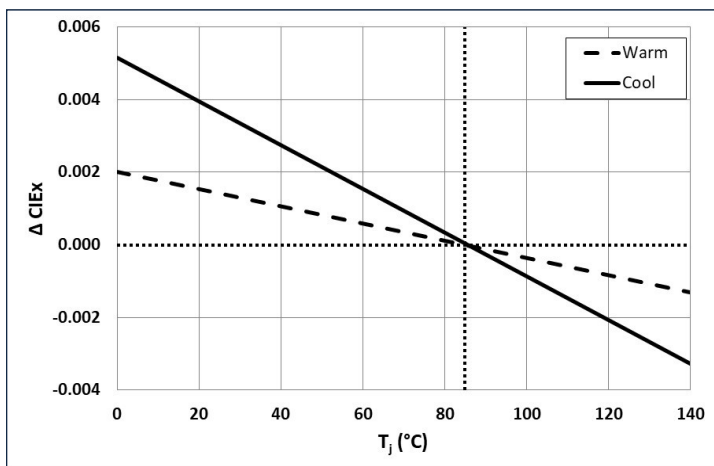

Relative Chromaticity vs Temperature

$I_f = 350\text{ mA (Cool White)}, I_f = 20\text{ mA (Warm White)}$

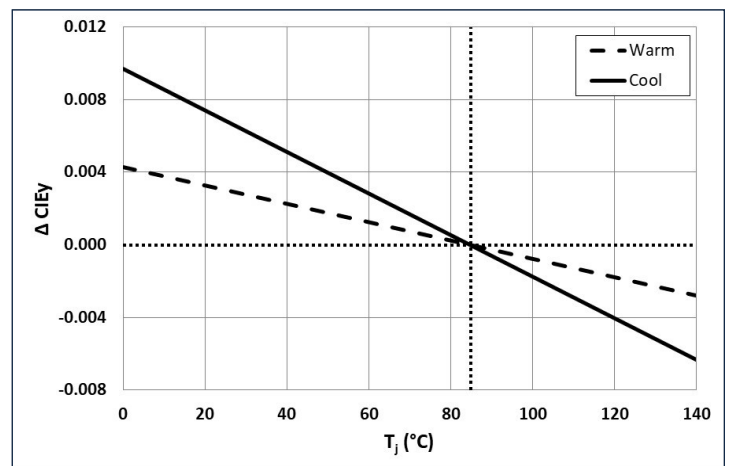




Dimming Profile


Dimming Profile (3018, 90CRI)

$T_j = 85^\circ\text{C}$

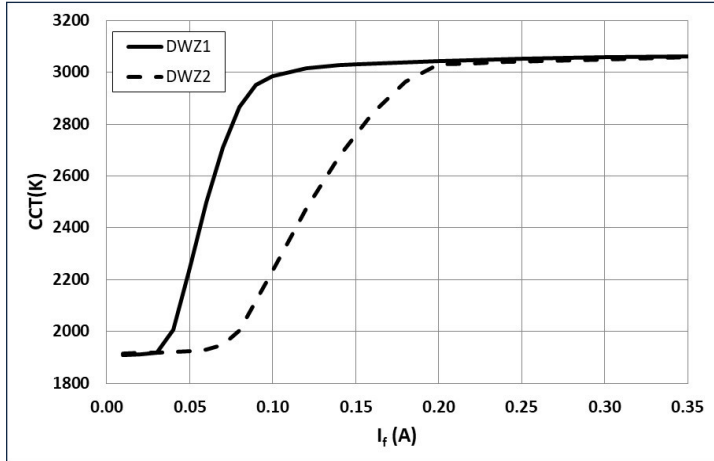


Dimming Profile (3020, 90CRI)

$T_j = 85^\circ\text{C}$

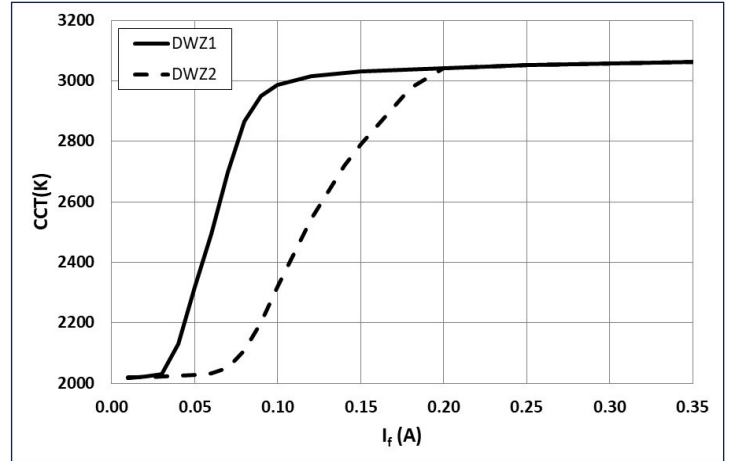

Dimming Profile (2718, 90CRI)

$T_j = 85^\circ\text{C}$

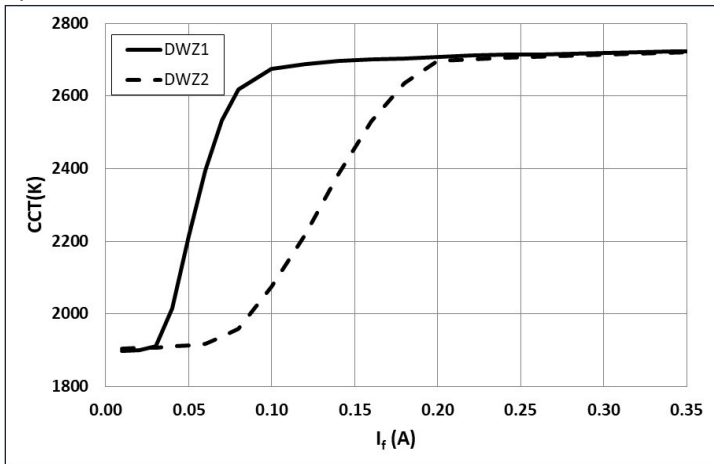




Angular Distribution and Typical Spectrum


Typical Angular Radiation Pattern

$T_j = 85^\circ\text{C}$ with 20 ms Pulse mode

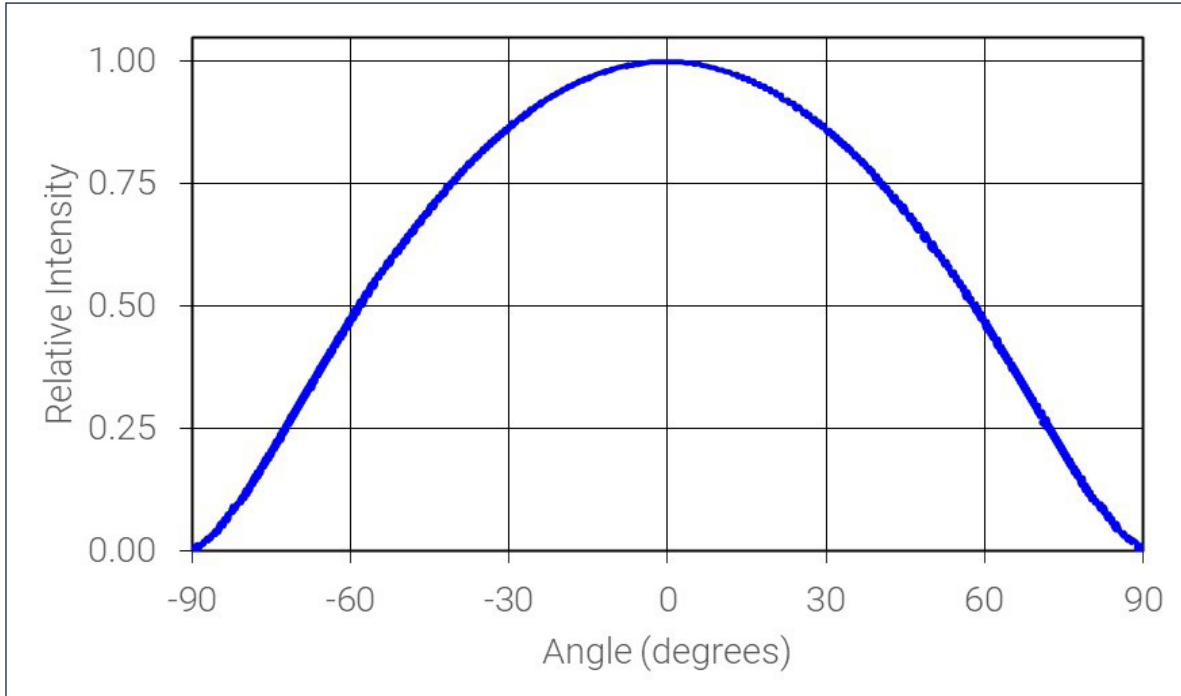

Typical Polar Radiation Pattern


$T_j = 85^\circ\text{C}$ with 20 ms Pulse mode

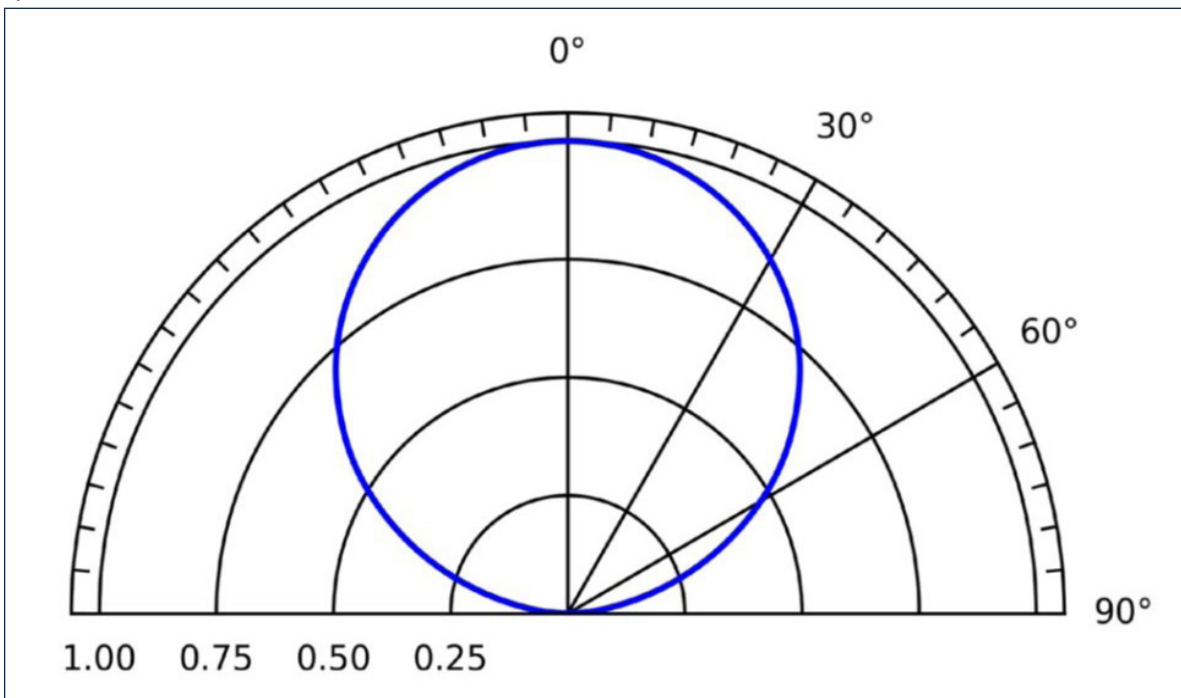




Relative Spectral Power Distribution

$T_j = 85^\circ\text{C}$

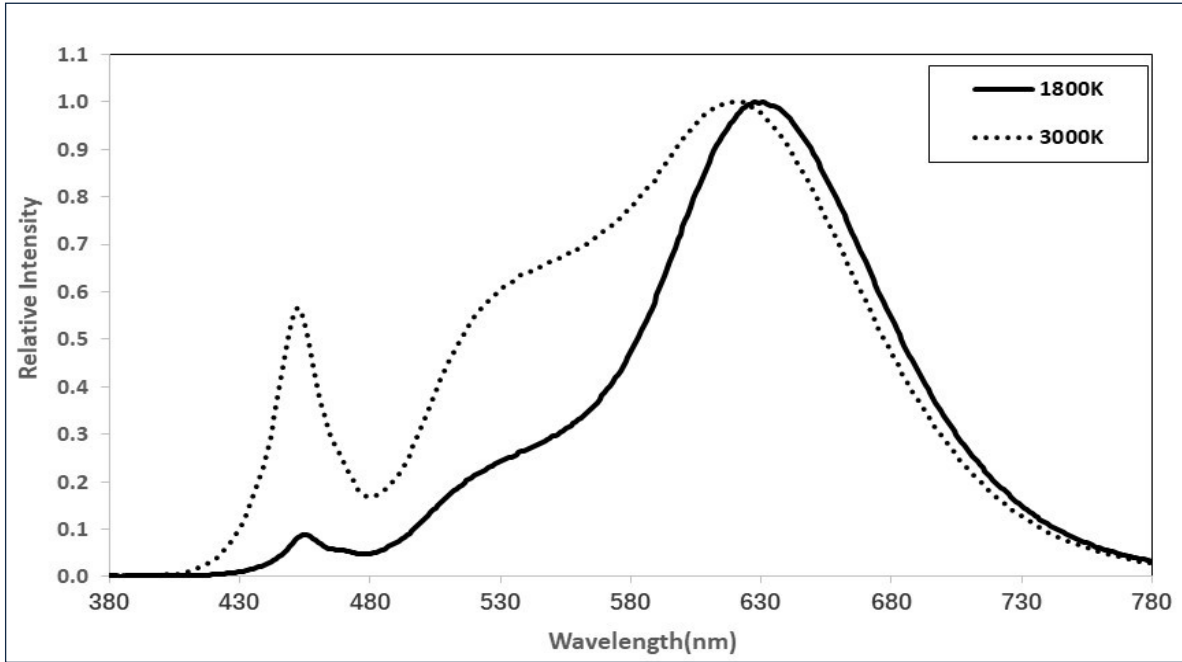

Relative Spectral Power Distribution


$T_j = 85^\circ\text{C}$

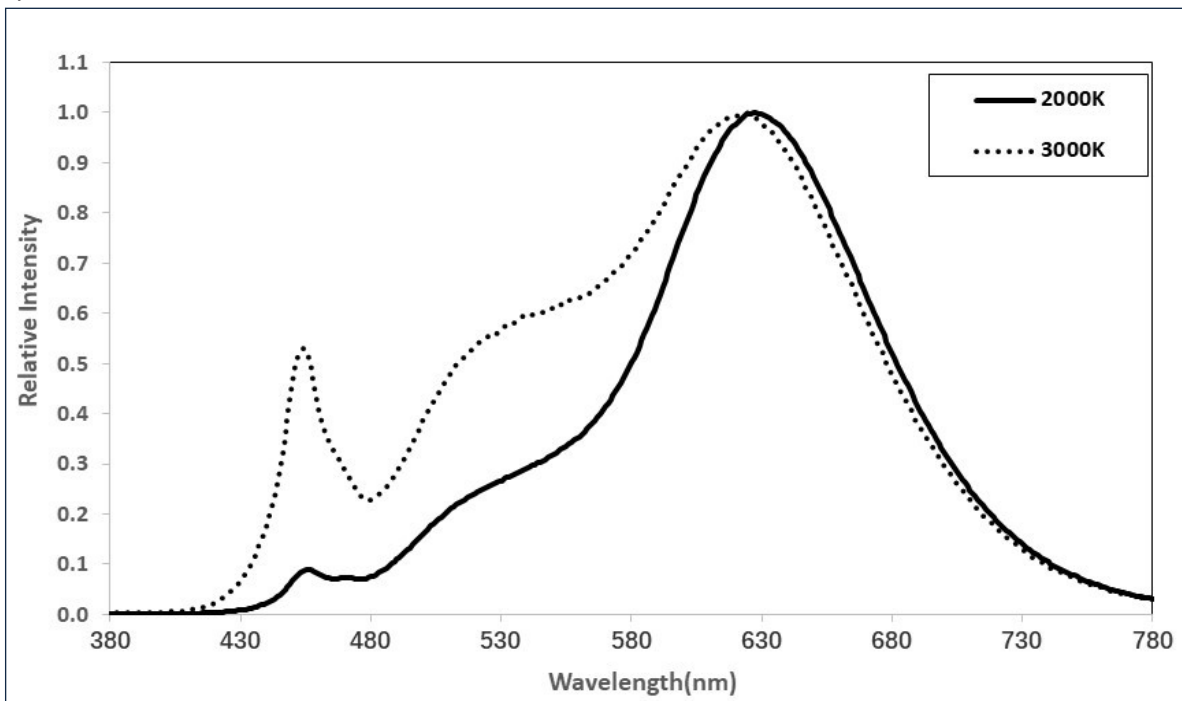




Relative Spectral Power Distribution

$T_j = 85^\circ\text{C}$

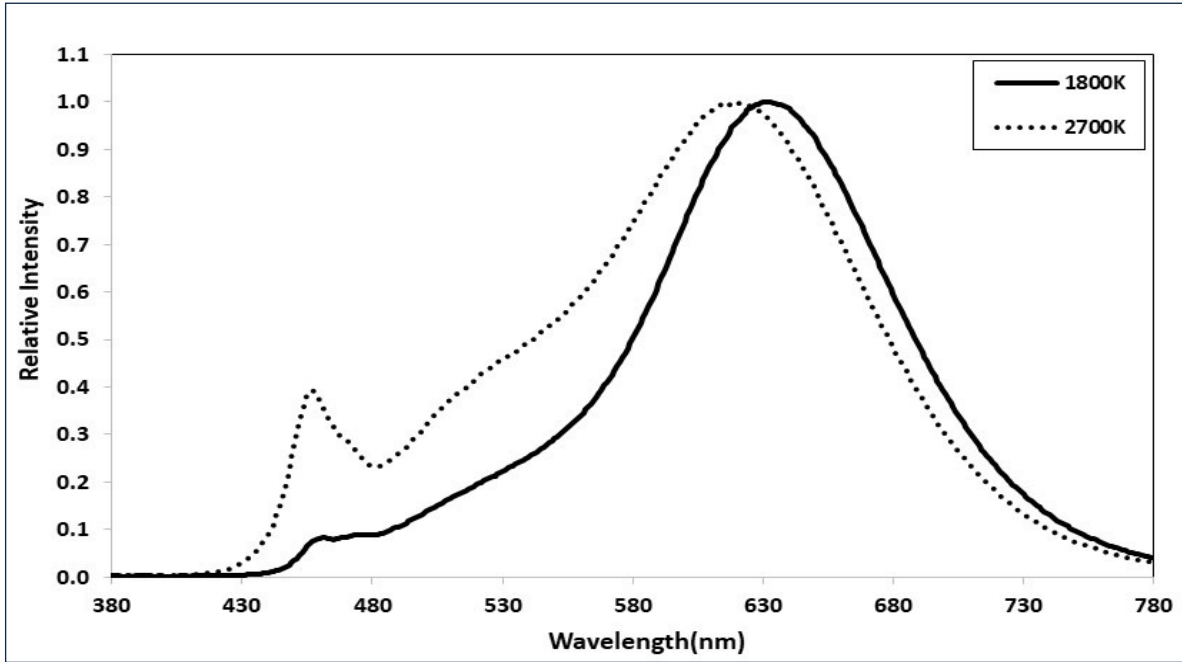



Mechanical Dimensions - DWZ1/2

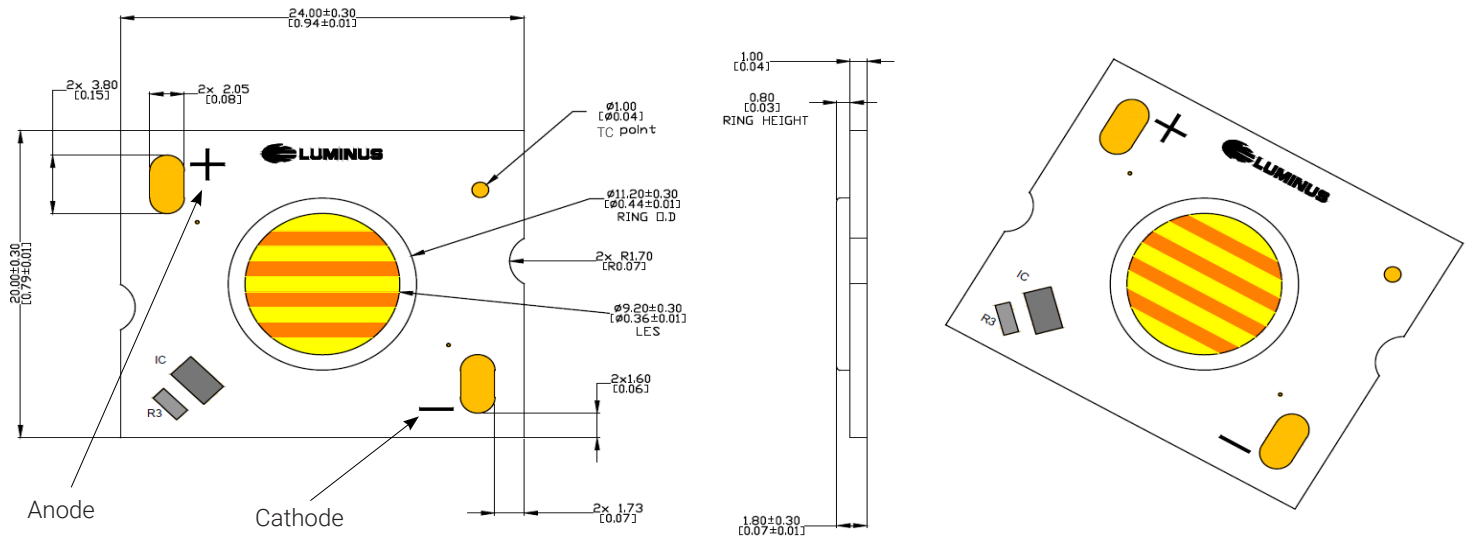

Note:

1. Unless otherwise specified, tolerance is ± 0.3 mm.



Shipping Tray Outline

Packaging boxes




Notes:

1. 35 devices per tray, with a maximum stack of 5 trays per pack
2. Each pack is placed in anti-static moisture barrier bag.



Shipping Label

Label on Packaging Box

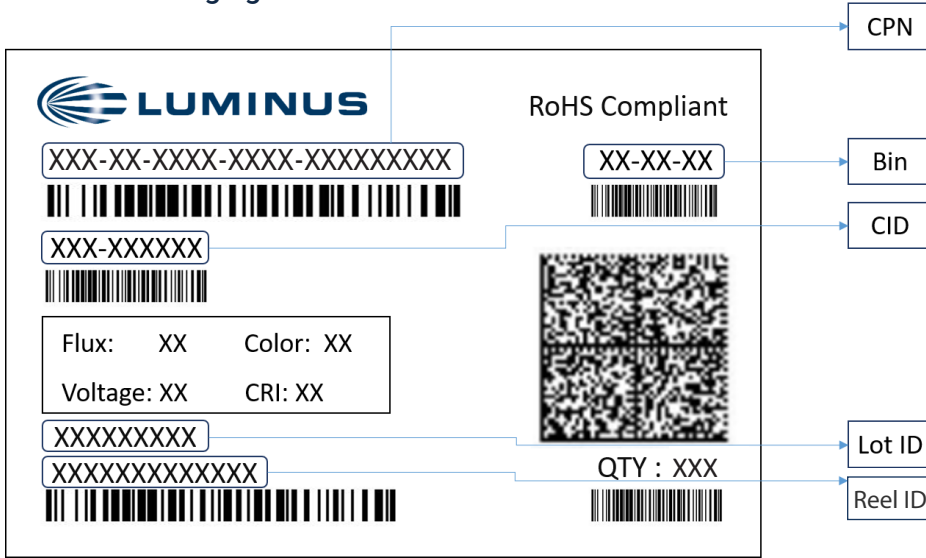

Label Fields:

- CPN: Luminus ordering part number
- CID: Customer's part number
- QTY: Quantity of parts per reel
- Flux: Bin as defined on page 2
- Voltage: NA
- Color: Bin as defined on page 4
- CRI: NA



Revision History

Rev	Date	Description of Change
01	11/20/2024	Initial release