


# 3<sup>rd</sup> Generation 1200V/60A SiC Schottky Barrier Diode

## Features

- Zero Reverse Recovery Current
- Ceramic Package Provides 2.5kV Isolation
- Positive temperature coefficient
- Temperature-independent performance
- High-speed switching
- Low switching loss
- Low heat dissipation requirements
- RoHS compliant

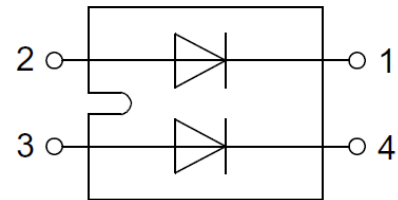

Package Type: SOT-227

## Potential Applications

- Solar inverter
- Uninterruptible Power Supply (UPS)
- Switched-mode power supplies
- Welding equipment
- High speed rectifier



## Description

The SLS120J060A SiC Schottky Barrier Diode (SBD) Module has been developed using Sanan’s advanced 3<sup>rd</sup> generation SiC SBD technology with the highest performance and reliability. It registers higher efficiency, higher operation temperature and lower loss and can be operated at higher frequency than Si-based solutions. As to the Schottky structure, it shows no recovery at turn-off and allows a low leakage current with reverse voltage up to 1200V. It can contribute to system miniaturization and achieve lightweight system design. Using RoHS compliant components, it is qualified for use in industrial application.

## Product Specifications

Device	V <sub>RRM</sub>	I <sub>F</sub> (110°C)	V <sub>F</sub> (25°C)	Q <sub>c</sub>	Marking
SLS120J060A	1200V	69A	1.40V	323nC	SLS120J060A

## CONTENTS

Features.....	1
Potential Applications.....	1
Description.....	1
Product Specifications .....	1
Table 1 Maximum Ratings.....	3
Table 2 Thermal Resistance.....	3
Table 3 Static Electrical Characteristics.....	4
Table 4 Dynamic Electrical Characteristics .....	4
Electrical Characteristic Diagrams.....	5
Package Information .....	7
Ordering Information .....	8
Important Notices – Read Carefully .....	9
Warning .....	9

**Table 1. Maximum Ratings**

(Tc = 25°C, unless otherwise specified)

Parameter	Symbol	Value	Unit	Test conditions
Repetitive peak reverse voltage	$V_{RRM}$	1200	V	$T_C = 25^\circ C$
Surge peak reverse voltage	$V_{RSM}$	1200		$T_C = 25^\circ C$
DC reverse voltage	$V_{DC}$	1200		$T_C = 25^\circ C$
Continuous forward current	$I_F$	115	A	$T_C = 25^\circ C$
		69		$T_C = 110^\circ C$
		60		$T_C = 126^\circ C$
Surge non-repetitive forward current	$I_{FSM}$	480	A	$T_C = 25^\circ C, t_p = 10ms,$ half sine pulse
Power dissipation	$P_{tot}$	312	W	$T_C = 25^\circ C$
$i^2t$ value	$\int i^2 dt$	1152	$A^2s$	$T_C = 25^\circ C, t_p = 10ms$
Virtual junction temperature	$T_{VJ}$	-40~175	$^\circ C$	
Operation temperature	$T_{OP}$	-40~150	$^\circ C$	
Storage temperature	$T_{stg}$	-40~150	$^\circ C$	
Mounting torque	M	1.1	Nm	M4 screw

**Table 2. Thermal Resistance**

Parameter	Symbol	Values			Unit	Test condition
		Min.	Typ.	Max.		
Thermal resistance from junction to case	$R_{th(j-c)}$	/	0.48	/	$^\circ C/W$	

**Table 3. Static Electrical Characteristics**

(T<sub>j</sub> = 25°C, unless otherwise specified)

Parameter	Symbol	Values			Unit	Test conditions
		Min.	Typ.	Max.		
DC blocking voltage	V <sub>DC</sub>	1200	/	/	V	I <sub>R</sub> = 200 μA
Forward voltage	V <sub>F</sub>	/	1.40	1.60	V	I <sub>F</sub> = 60A, T <sub>j</sub> = 25°C
		/	1.90	2.30		I <sub>F</sub> = 60A, T <sub>j</sub> = 175°C
Reverse current	I <sub>R</sub>	/	10	180	μA	V <sub>R</sub> = 1200V, T <sub>j</sub> = 25°C
		/	60	960		V <sub>R</sub> = 1200V, T <sub>j</sub> = 175°C

**Table 4. Dynamic Electrical Characteristics**

(T<sub>j</sub> = 25°C, unless otherwise specified)

Parameter	Symbol	Values			Unit	Test conditions
		Min.	Typ.	Max.		
Total capacitance	C	/	4692	/	pF	V <sub>R</sub> = 0V, f = 1MHz
		/	302	/		V <sub>R</sub> = 400V, f = 1MHz
		/	225	/		V <sub>R</sub> = 800V, f = 1MHz
Total capacitive charge	Q <sub>C</sub>	/	323	/	nC	V <sub>R</sub> = 800V
Capacitance stored energy	E <sub>C</sub>	/	92	/	μJ	V <sub>R</sub> = 800V

### Electrical Characteristic Diagrams

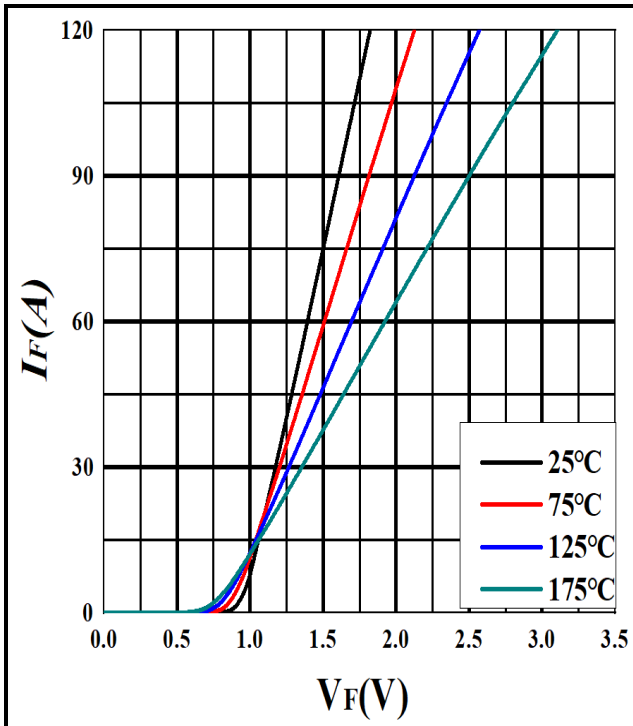


Figure 1. Forward characteristics

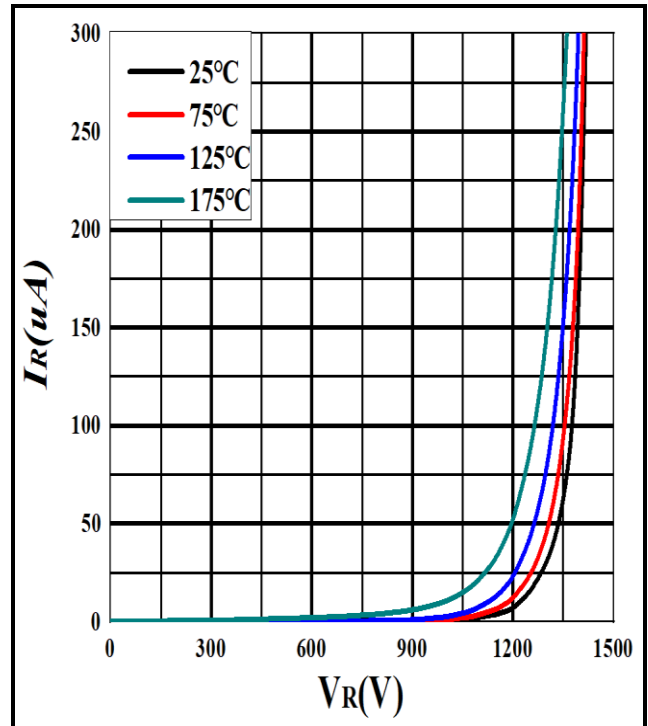


Figure 2. Reverse characteristics

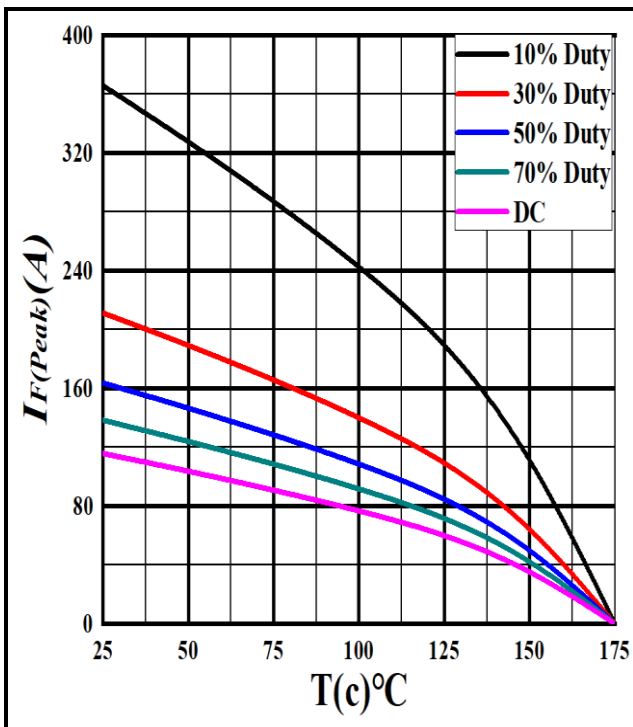


Figure 3. Current derating

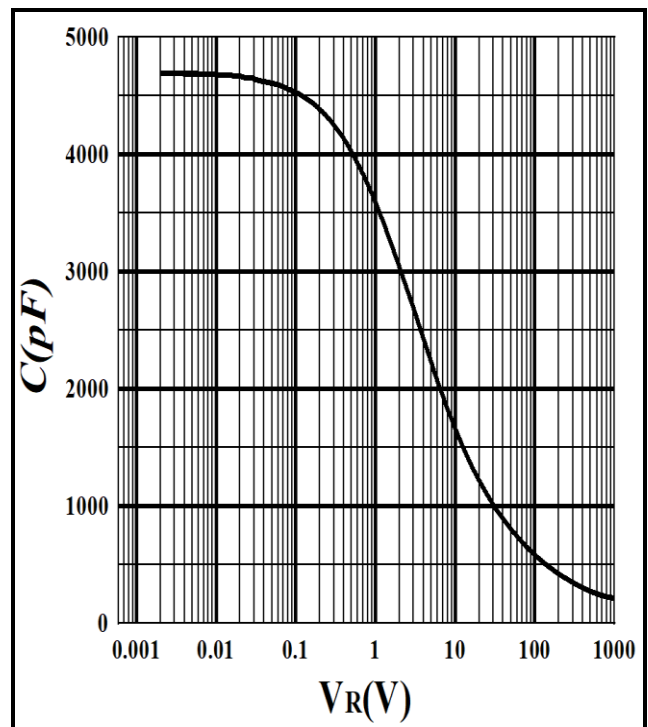


Figure 4. Capacitance vs. reverse voltage

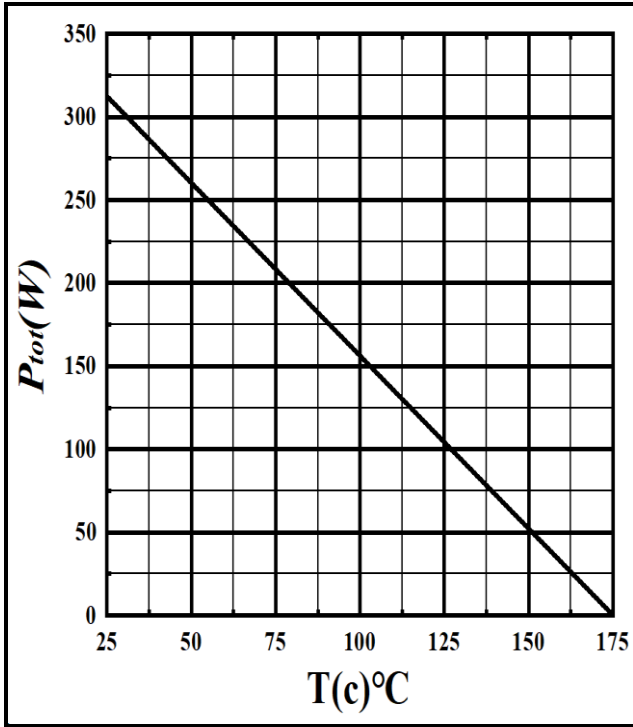


Figure 5. Power derating

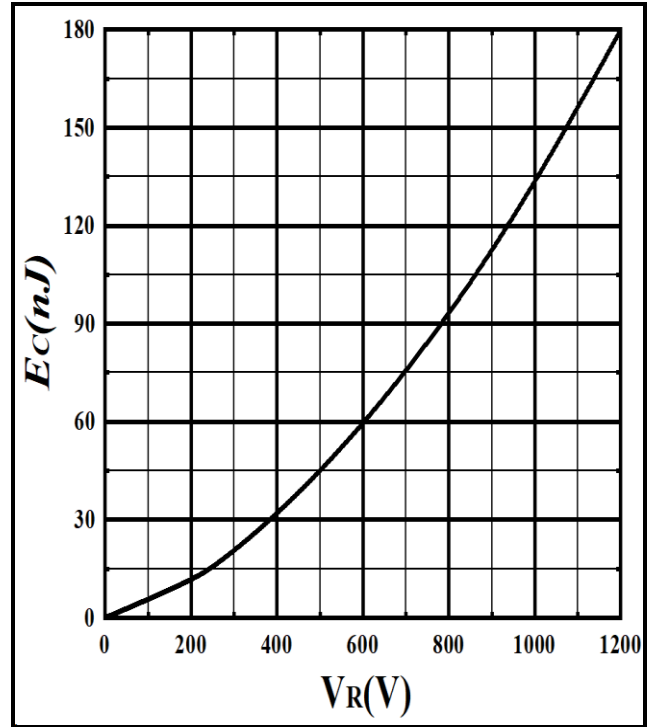


Figure 6. Capacitance stored energy


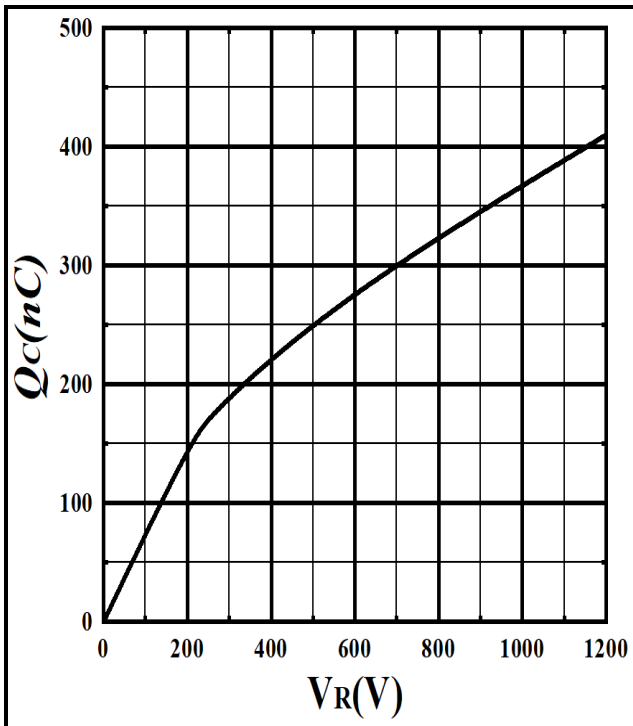


Figure 7. Total capacitance charge vs. reverse voltage

## Package Information

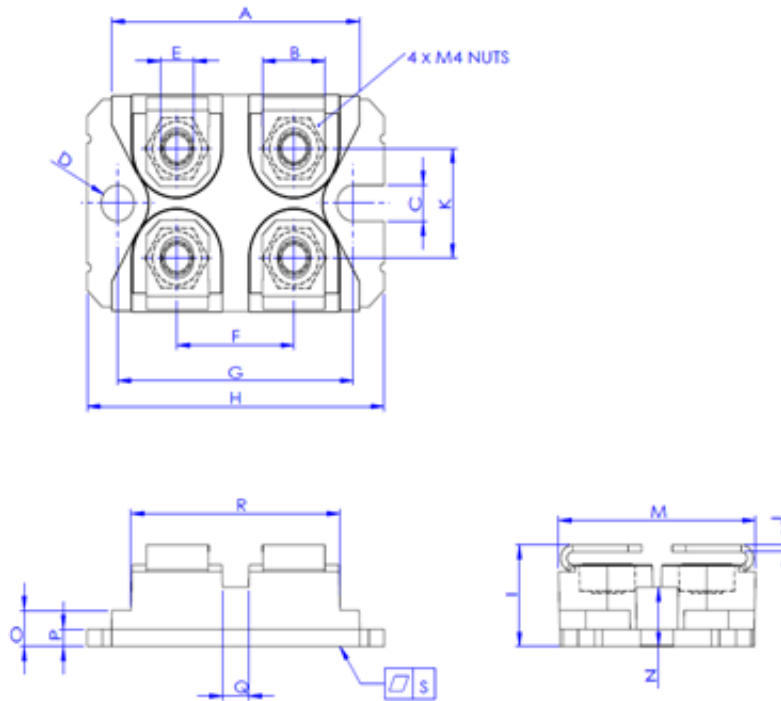

Dimension unit: [mm]			
Symbol	Min	Nom	Max
A	31.50	31.80	32.10
B	7.70	8.00	8.30
C	4.10	4.20	4.30
D	4.10	4.20	4.30
E	4.10	4.24	4.30
F	14.90	15.00	15.15
G	29.80	30.20	30.50
H	37.80	38.00	38.30
I	11.70	11.82	12.20
J	0.75	0.80	0.85
K	12.50	12.75	13.00
M	25.00	25.75	25.50
N	6.70	6.90	7.05
O	4.10	4.20	4.50
P	1.90	2.00	2.10
Q	3.20	3.36	3.60
R	26.60	26.78	27.00
S	-0.03	0.05	0.10

## Ordering Information

Part number	SLS120J060A-ISBTH
Package	SOT-227
Unit quantity	100EA
Packing type	Tube



## Important Notices – Read Carefully

Before you use our products, you are requested to carefully read this document and fully understand its contents. Hunan Sanan Semiconductor Co., Ltd. (Hunan Sanan) shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of Hunan Sanan's products.

Hunan Sanan Semiconductor Datasheets are subject to change. Information presented in this document is from the characterization of engineering lots. Hunan Sanan reserves the right to change limits, test conditions, and dimensions without notice. Information contained in this document are typical values and shall in no event be regarded as a guarantee of characteristics. With respect to any information regarding the application of the product, Hunan Sanan hereby disclaims all warranties and liabilities of any kind. The information in this document is exclusively for trained technical staff. It is the responsibility of the customer's technical department to decide the suitability of the product in the customer's application and Hunan Sanan assumes no responsibility or liability whatsoever for the use of the information contained in this document.

In case there is any clause in this document or in any other documents which is contradictory to this clause, this clause shall prevail. This clause shall survive after termination of this document.

## Warning

Due to technical requirements, Hunan Sanan products may contain dangerous substances. For detailed information about the substance(s), please contact the Hunan Sanan office. Hunan Sanan bears no responsibility for any damage whatsoever due to the substance(s) used in Hunan Sanan products.

## Contact info

Website: <https://www.sanan-semiconductor.com/>  
<https://www.sanan-semiconductor.com/en>